




REV	DESCRIPTION	DATE	APPROVE
P1	PRELIMINARY	19/11/25	QYJ
P2	PRELIMINARY	19/12/04	QYJ

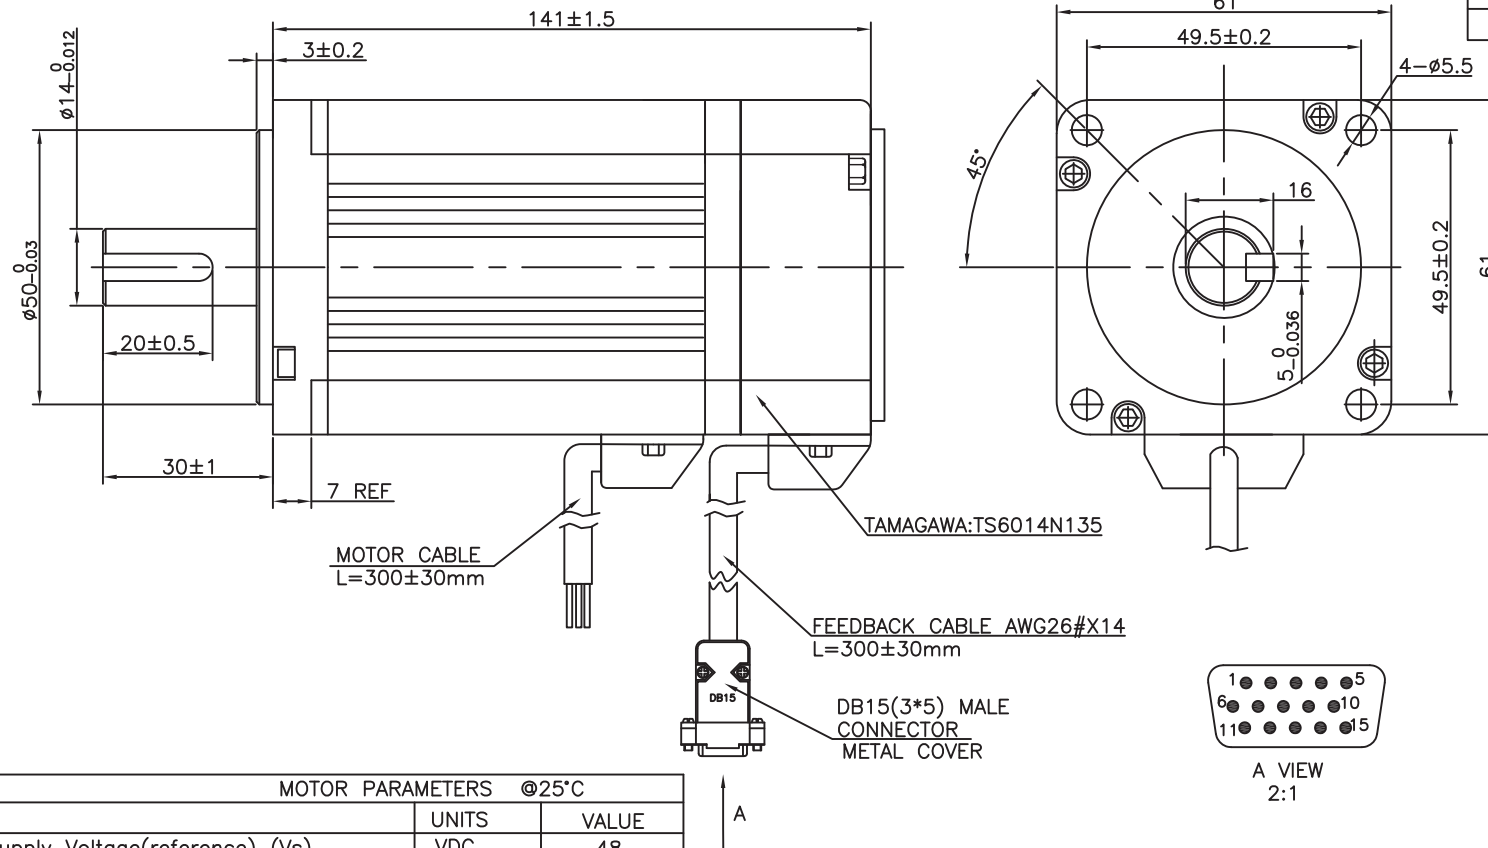

ENCODER SPECIFICATION	
VOLTAGE	+5VDC±5%
CURRENT	<60mA
FREQUENCY	0~300khz
TEMPERATURE	-30~105°C
ENCODER	2500PPR
OUTPUT WAVEFORMS	
ROTATION:CCW AS VIEWED FROM SHAFT END	

ENCODER CONNECTIONS		
PIN	COLOR	SIGNAL
1	BLU	A+
2	GRN	B+
3	BLK	GND
4	GAY	W+
5	BRN	U+
6	BRN/BLK	U-
7	YEL	Z+
8	YEL/BLK	Z-
9	WHT	V+
10	WHT/BLK	V-
11	BLU/BLK	A-
12	GRN/BLK	B-
13	RED	+5v
14	GAY/BLK	W-
15	/	/

MOTOR PARAMETERS @25°C		
	UNITS	VALUE
Supply Voltage(reference) (Vs)	VDC	48
Rated Continuous Torque (Tcr)	Nm	1.30
Rated Speed at Cont.Torque (Scr)	R.P.M.	3000
Rated Continuous Stall Current (Ics)	A	18.41
Rated Continuous Output Power (Po.c)	W	410
Motor Constant (Km)	Nm/√w	0.1408
Torque Constant (KT)	Nm/A	0.0745
Voltage Constant (KE)	Vrms/krpm	5.8
Terminal Resistance (Rmt)	ohms	0.18
Inductance (L)	mH	0.2
Rated Peak Current (Ipr)	A	56.89
Rated Peak Torque (Tpr)	Nm	4.05
Coulomb Friction Torque (Tf)	Nm	0.025
Insulation Class	F	
Rotor Inertia (Jr)	Kg.m ²	2.9E-05
Motor Weight (Wm)	Kg	1.54
Feedback Device		2500p/rev

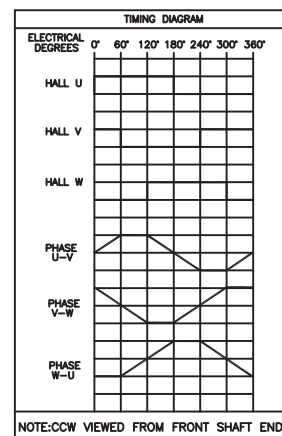

MOTOR CONNECTIONS		
	COLOR	SIGNAL
	YEL	U
	GRN	V
	BLUE	W
	YEL/GRN	GND

NOTE: THIS DRAWING HAS BEEN CREATED BY AUTOCAD. MANUAL REVISIONS ARE NOT ALLOWED.

MATERIAL		TOLERANCE UNLESS OTHERWISE SPECIFIED ISO 2768-1 MEDIUM			
DRAWN XXX	CHECKED XXX	APPROVED - DATE	FILENAME N/A	DATE XXX	SCALE N/A
			BRUSHLESS SERVO MOTOR		
			SV060AS-315		
					SHEET 1/1