
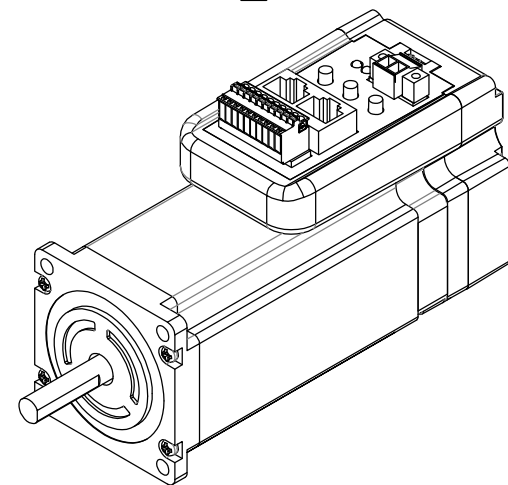


MOTOR CONNECTIONS



SPECIFICATIONS

Input Voltage	20-50VDC	Temperature Rise Max	80°C
Number of phase	2	Weight	1700g
Step angle	1.8°	Dielectric Strength	500V AC
Position Accuracy	1.8±0.09°	Insulation Resistance	500mΩ/min
Rated Current/phase	4.0A	Insulation Class (UL)	B
Resistance/phase	0.48Ω±10%	Working Ambient Temperature	0-50°C
Inductance/phase	2.0MH±20%	Working Ambient Humidity	20%~90% RH
Holding Torque	3Nm	Storage Ambient Temperature	-20~70°C
Position Torque	1200gcm	Storage Ambient Humidity	15%~90% RH
Rotate Inertia	780g.cm ²		

Dept.	Technical reference	Created by	Approved by
		Document type	Document status
		Title	INTEGRATED STEPPER MOTOR
		Rev.	Date of issue
		Sheet	



STIC57-36-30-RC