



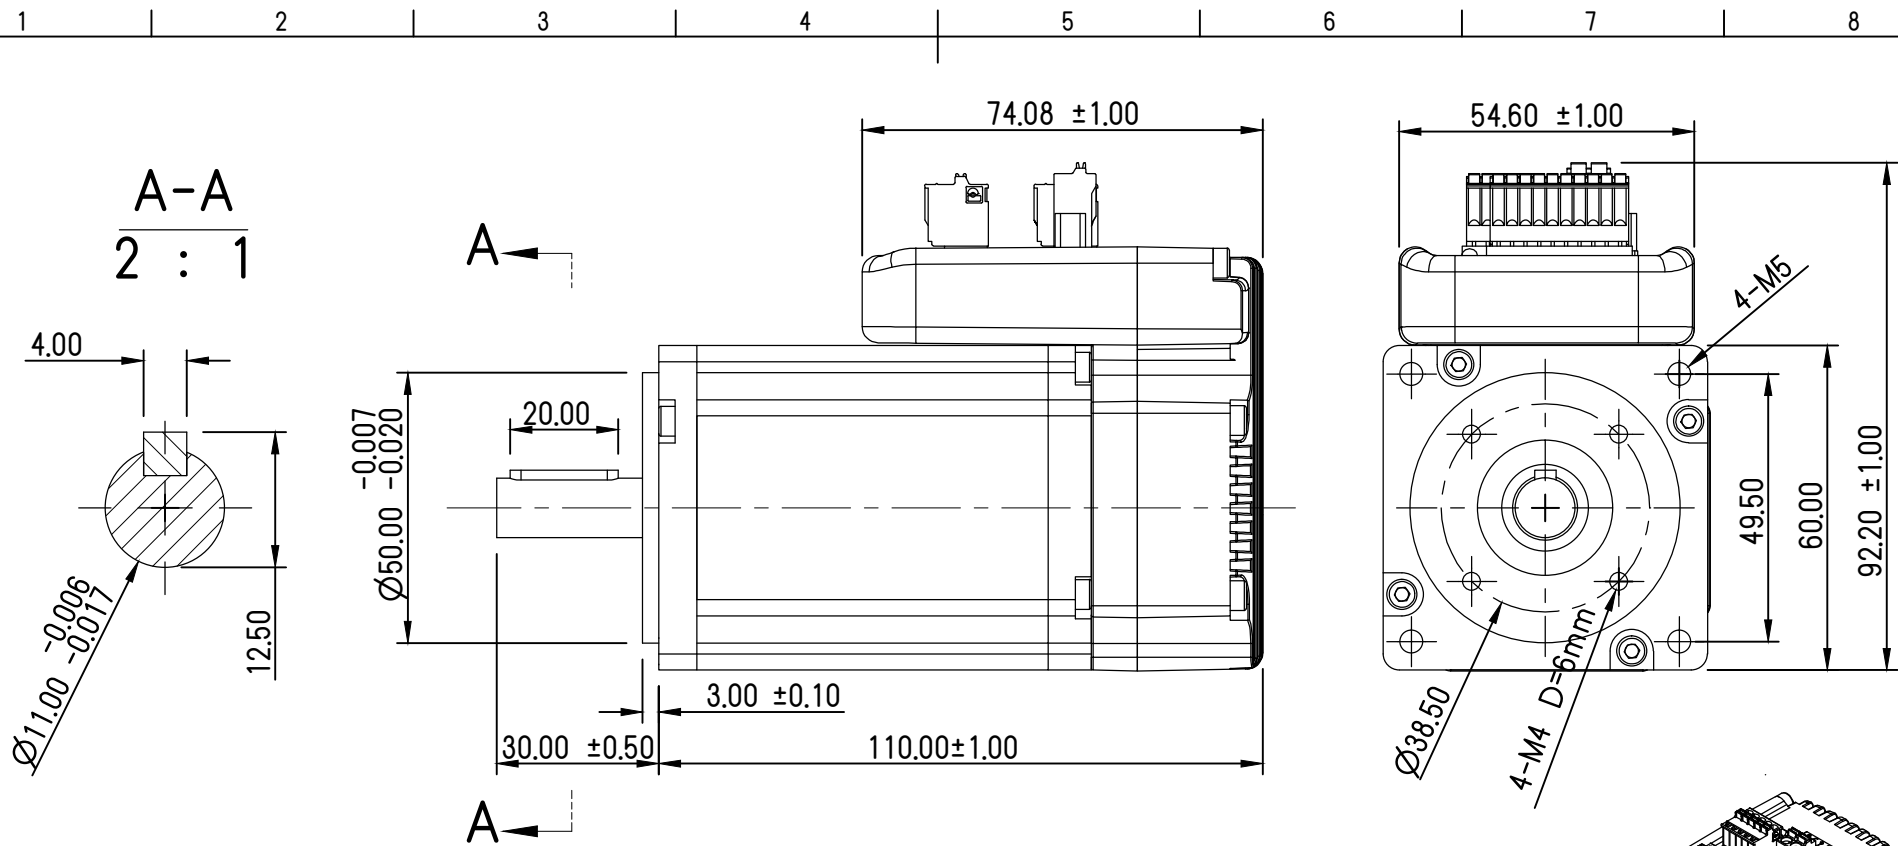

U	YEL	18AWG
V	GRN	105°C
W	BLU	
GND	BLK	28AWG
+5V	RED	125°C
HALL B	GRN	UL3265
HALL C	BLU	
HALL A	YEL	

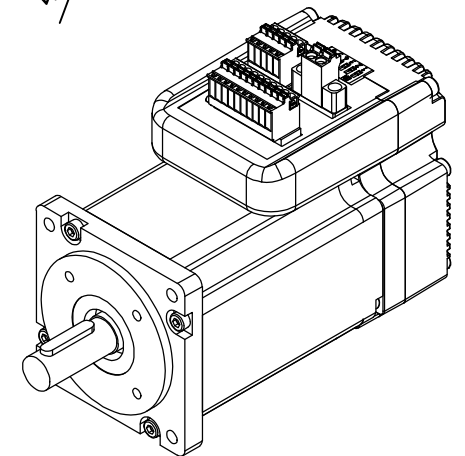

SPECIFICATION

Rated speed	3000rpm $\pm$ 7%		
Input Voltage	20-36VDC	Rotate Inertia	3.25kg.cm ²
No-load speed	4200rpm $\pm$ 10%	Weight	1.6kg/3.6lbs
Rated current	8.5A $\pm$ 20%	Resistance	0.6 Ω $\pm$ 10%
No-load current	0.8A $\pm$ 0.15	Insulation Class (UL)	B
Rated Torque	0.65Nm	Torque Coefficient	0.082Nm/A

Dept.	Technical reference	Created by	Approved by
		Document type	Document status
		Title	INTEGRATED SERVO MOTOR
		SVIC-60-30-20-36	Rev. Date of issue Sheet

