



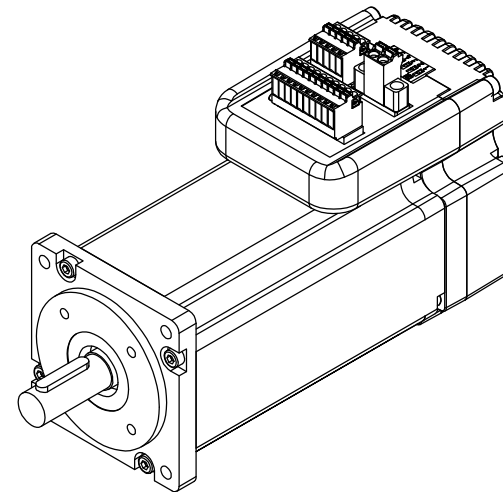

Input Voltage	20-50V			
Rated Power	400W			
No-load speed	4200rpm±10%			
Peak current	11.2A	U	YEL	18AWG 105°C
Rated speed	3000rpm±10%	V	GRN	
Rated torque	1.27Nm	W	BLU	
Rated current	1.2A	GND	BLK	28AWG 125°C UL3265
Max. Torque	3.5Nm	+5V	RED	
Torque coefficient	0.082Nm/A	HALL B	GRN	
Resistant phase	0.6Ω±10%	HALL C	BLU	
Rotor inertia	68kg.mm ²	HALL A	YEL	

Dept.	Technical reference	Created by	Approved by
		Document type	Document status
		Title	INTEGRATED SERVO MOTOR
		SVIC60-30-40-48	Rev. Date of issue Sheet

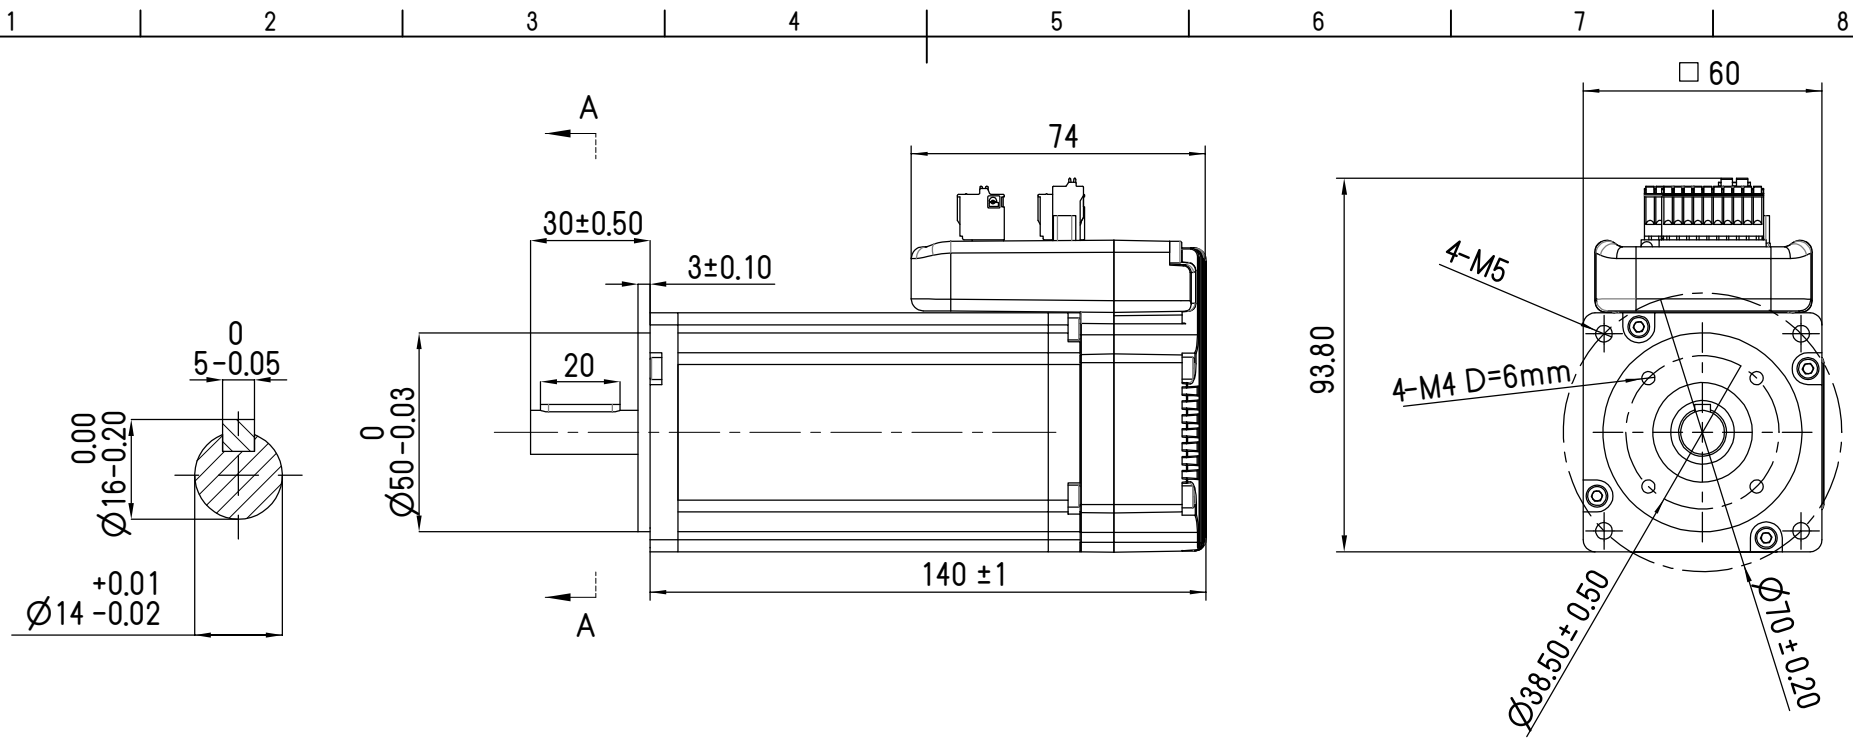