



NOTES:

- 1.HI-POT: 600VAC/1sec., 2mA
- 2.USE NMB BEARING FOR THE MOTOR

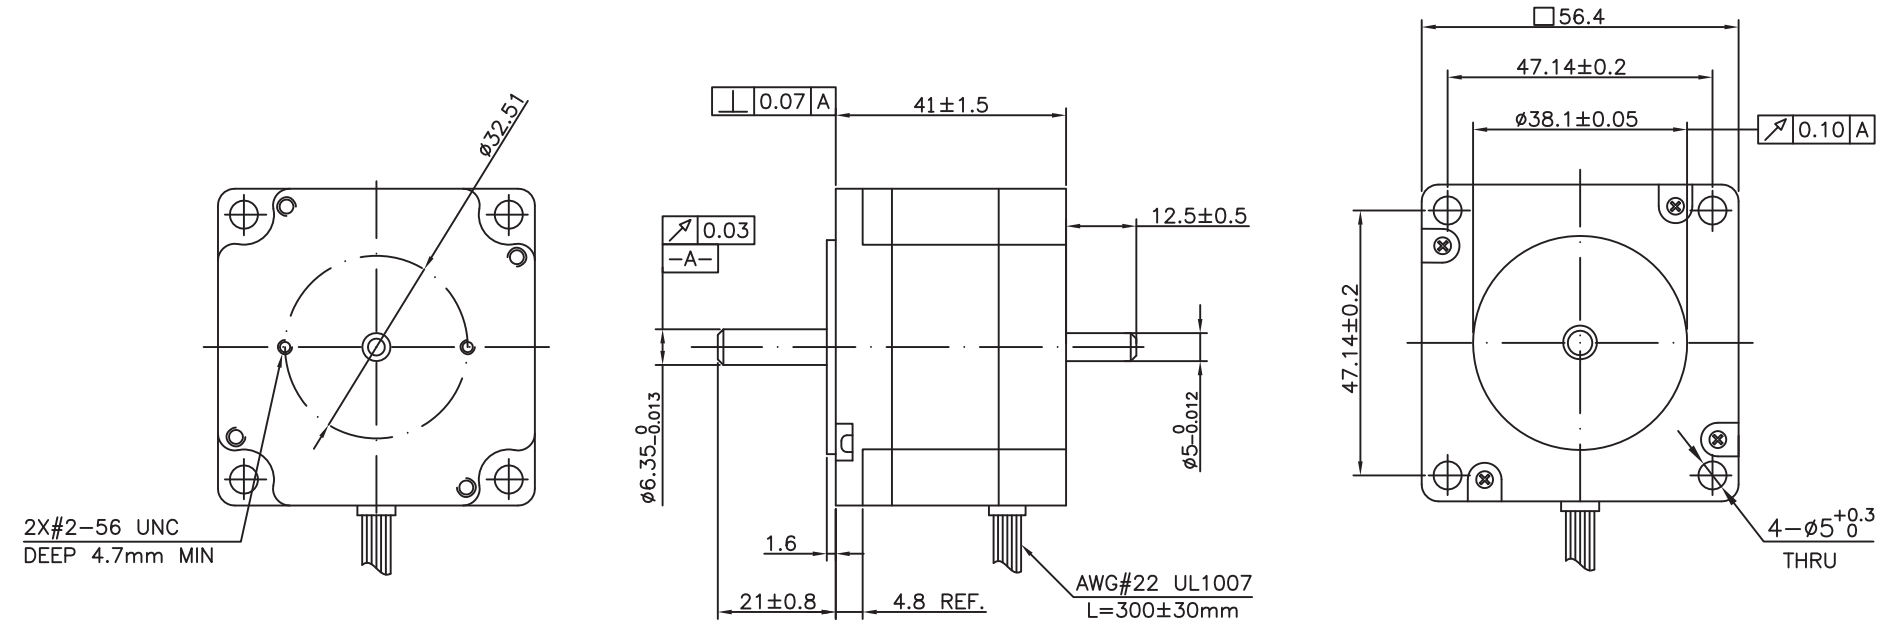


MOTOR PARAMETERS			
	UNITS	TOLERANCE	VALUE
STEP ANGLE	°		1.8
ACCURACY			±5%
HOLDING TORQUE	Ncm		39.2
RATED CURRENT	A/ph		1.0
PHASE RESISTANCE	Ohms	±10%	5.2
PHASE INDUCTANCE	mH	±20%	8.7
DETENT TORQUE	Ncm	Max	3.92
ROTOR INERTIA (Ja)	gcm <sub>2</sub>		135
WEIGHT	g		420



This drawing and the information disclosed herein are proprietary data of Mach Motion Products, and is to be immediately returned upon request. Reproduction of this drawing or the information contained herein is prohibited without the expressed written approval of Mach Motion Products.

NOTE: THIS DRAWING HAS BEEN CREATED BY AUTOCAD. MANUAL REVISIONS ARE NOT ALLOWED.

MATERIAL		TOLERANCE ON DECIMAL: X±0.5    XX±0.25    XXX±0.13    ANGLE:±1° UNLESS OTHERWISE SPECIFIED			
DRAWN ZQY	CHECKED	APPROVED - DATE	FILENAME	DATE 04/03/10	SCALE N/A
			STEPPING MOTOR		
			ST057NB025		
					SHEET 1/1